

Rec'd PCT/PTO 23 FEB 2004



10/501, 3/3
PCT/AU03/00010


REC'D 04 FEB 2003

WIPO PCT

Patent Office
Canberra

BEST AVAILABLE COPY

I, JONNE YABSLEY, TEAM LEADER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. PR 9980 for a patent by DESIGN DEVELOP COMMERCIALISE PTY LTD as filed on 17 January 2002.

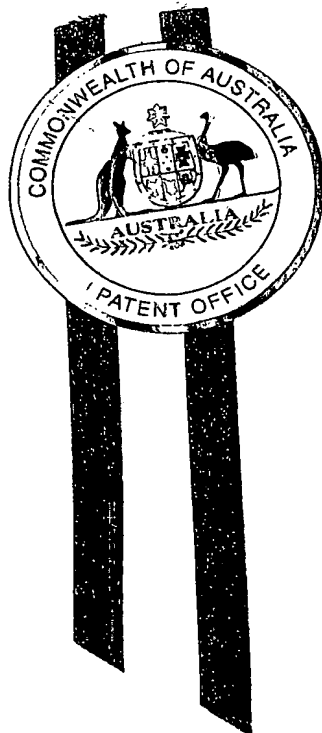

WITNESS my hand this
Twenty-fourth day of January 2003

J Yabsley

JONNE YABSLEY
TEAM LEADER EXAMINATION
SUPPORT AND SALES

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)




DESIGN DEVELOP COMMERCIALISE PTY LTD

AUSTRALIA
PATENTS ACT 1990

PROVISIONAL SPECIFICATION FOR THE INVENTION ENTITLED:

“MODULAR PLASTIC FLOORING”

This invention is described in the following statement:



This invention relates to plastic material tiles which are supported on a surface to provide a playing surface for recreational games and temporary flooring surfaces for special events.

5 More particularly the present invention pertains to modular tiles of plastic composition which are interlocked to form a playing surface.

10 A wide variety of floor coverings have been developed for use as playing surfaces for sports. Interlocking plastic tile floor coverings have grown in popularity due to their shock absorbent characteristics, which can help prevent injury to athletes, their versatility (can be indoor or outdoor) and affordability. Plastic flooring can also be quickly installed and removed for special events and sports competitions.

15 Structurally interlocked tile floor coverings generally comprise several interlocked plastic tiles in a grid like configuration. Each tile may have an underside provided with a rib arrangement and support legs extending from the ribs. The interlocking members typically comprise laterally extending connector members which are adapted to connect with corresponding members on adjacent tiles so as to connect the adjacent tiles together.

20 Although interlocking tile floors have grown in popularity because of their versatility, there have been problems during their use.

25 One problem is that square or rectangular tiles which are easy to lay out and to join together have provided long lines of joins which can deflect hockey pucks and balls travelling over the surface. Also square or rectangular tiles have become distorted which have caused corners of tiles to lift which can cause tripping problems for sports people.

30 It is an object of this invention to overcome at least some of these problems.

In one form therefore, although this may not necessarily be the only or broadest form, the invention is said to reside in a modular plastic floor assembly formed from a plurality of shaped tiles and a plurality of shaped connector tiles, the shaped tiles being substantially larger than the shaped connector tiles and the shaped connector tiles being adapted to fit into interstices between the shaped tiles when the floor assembly is formed, each of the shaped tiles and the shaped connector tiles including a body having a substantially planar upper surface and a support array extending from a lower surface of the body, the support array being integrally formed with the body and comprising items having a common length such that their lower ends define a floor engaging plane, the shaped tiles having a plurality of first connector means and the shaped connector tiles having a plurality of complementary second type connector means, the first and second type connector means adapted to interengage to interlock the shaped tiles to adjacent shaped connector tiles.

Preferably the first and second type connector means are formed so that the shaped tiles and shaped connector tiles are spaced apart by a selected distance preferably 1 to 2 mm to take up shock load and thermal expansion and contraction.

There may be provided spring loaded fingers extending laterally on the shaped connector tiles to space the shaped tiles and shaped connector tiles apart. Such spring loaded fingers may be provided by integrally moulding plastic springs into the tiles. Alternatively the spring loaded fingers may be on the shaped tiles to engage against the connector tiles in use or there may be a combination of the spring loaded fingers provided on both the shaped tiles and the connector tiles sharing shock load and thermal expansion and contraction.

The support array may comprise a plurality of separated support walls which can be provided in a plurality of orientations such as triangles, squares or the like.

There may be further included a plurality of reinforcing structures under the body integrally formed with the body and being of lesser height than the common length and joining the free ends of the items having a common length.

Such reinforcing structures may for instance be squat cylinders or bosses.

5 The shaped tiles may be circular, octagonal, dodecagon shaped, triangular hexagon or other convenient shapes. The shaped connector tiles may be circular, octagonal, dodecagons, triangles or hexagons or the like to fit into the spaces between the shaped tiles.

10 The sides of the shaped tiles may be convex, straight or concave and the sides of the shaped connector tiles may be correspondingly convex, straight or concave.

The body may have apertures through it to allow water to drain off the upper surface so that the surface is not hazardous.


15 Each tile may have a perimeter wall extending to the floor engaging plane to provide good support around the edge of the tile.

The perimeter walls may include gaps to allow water drainage beneath the tiles.

20 In one preferred embodiment there may be female connector means on the shaped tiles and co-acting male connector means on the shaped connector tiles.

Alternatively there may be male connector means on the shaped tiles and co-acting female connector means on the shaped connector tiles. The male connector means
25 may include loops on one of the tiles which engage in female arcuate recesses in the underside of the other tile. There may also be included catch means or tabs associated with the loops to provide positive retention of the loops between the shaped and connector tiles.

30 The loop and arcuate recess connection method allows movement in the joint so that movement for thermal expansion and contraction can occur in the connection



and the movement is absorbed by the spring loaded fingers adjacent the connection means.

There may be provided minor patterning such as spherical dimpling, photo
5 chemically etched texture, electrical discharge machined texture or sand-blasted matt
finish, on the upper surface of the shaped tiles and shaped connector tiles.


It should be noted that there is no direct connection between the shaped tiles.
All the connections go via the shaped connector tiles.

10 There may be provided, however, sliding projections on the unconnected
edges of shaped tiles which interengage with slots in the walls of adjacent shaped
tiles to prevent the unconnected edges from lifting up above adjacent edges of
adjacent tiles.

15 The modular floor formed according to the present invention may include
edge pieces which enable a straight edged floor to be formed.

20 It will be seen that by this invention there can be provided a modular sports
flooring which when assembled has few continuous straight lines which could cause
an obstruction and would limit the effective use of the tile floor surface over which a
ball or hockey puck can easily travel.

25 The larger shaped tiles mean fewer edges which limit the effective use of the
tile as a ball or hockey puck contacting surface. The larger shaped tiles also mean that
fewer tiles are necessary to lay and therefore enabling quicker assembly and
disassembly. It also means that there may be less distortion through differential
thermal expansion and contraction, therefore, providing a flatter playing surface.
There are also fewer lifting corners or edges which can create safety hazards.



Because the thermal expansion and contraction is taken up at each connection, the overall dimensions of the floor remain substantially constant during changes in temperature.

5 This then generally describes the invention but to assist with understanding reference will now be made to the accompanying drawings which show preferred embodiments of the invention.

In the drawings:

10 Figure 1 shows an arrangement of shaped tiles and shaped connector tiles according to one embodiment of the invention;

Figure 2 shows a part view of the underside of a shaped tile;

Figure 3 shows the underside view of a shaped connector tile;

Figure 4 shows the upper side view of one embodiment of a shaped tile;

15 Figure 5 shows an underside view of an assembled shaped tile and shaped connector tile according to one embodiment of the invention with only a part of each of the shaped tile and the shaped connector tile shown;

Figure 6 shows a perspective view of the assembled tiles shown in Figure 5;

20 Figure 7 shows the arrangement of a spring loaded finger of one embodiment of the invention;

Figure 8 shows one view of the sliding projections on unconnected edges of the shaped tiles;

Figure 9 shows an alternative view of the sliding projections on unconnected edges of the shaped tiles;

25 Figure 10 shows an underside view of the sliding projections when two shaped tiles abut;

Figure 11 shows a schematic view of the expansion absorption process;

Figures 12A to F show alternative configurations of shaped tiles and shaped connector tiles of the present invention;

30 Figures 13A to D show alternative embodiments of shaped connector tiles;

Figures 14 A and B show a part view of the upper and under sides of an alternative embodiment of a shaped connector tile with connection means and spring loaded finger configuration;

Figure 15 shows part of the underside of an alternative embodiment of shaped tiles with its associated connector means;

Figure 16 shows a further detail of the alternative connection means shown in Figure 15; and

Figure 17 shows one possible arrangement of holes or apertures in the tiles.

Now looking more carefully at the drawings and in particular a first preferred embodiment of the shaped tiles and shaped connector tiles and their methods of connection as shown in Figures 1 to 10.

In Figure 1 it will be seen that the shaped tiles 1 are in the shape of a dodecagon with twelve sides but that six of the sides are slightly concave. Each shaped tile abuts with another shaped tile 1 but as will be discussed in relation to further drawings there are no connectors on these abutting faces. Connection is provided through a shaped connector tile 3 which is of a substantially triangular shape but with three convex sides. Each shaped connector tile 3 abuts three shaped tiles 1.

It will be noted that there are no long straight lines of join between the various tiles which if used would create a directional bias to give problems when playing sports on the floor.

In one preferred embodiment of the invention the diameter of the shaped tiles is 500 mm and there is a gap of approximately 1 mm to 2mm between the tiles to take up thermal expansion and contraction as will be discussed in relation to later drawings.

Figure 2 shows an underside view of part of a shaped tile 1.

Each tile comprises a body which has a substantially planar upper surface, side walls 6 extending down to a floor engaging plane and a support array extending from the lower surface. The support array comprises a triangulated rib configuration of ribs 5 which extend from bosses 7 which are shorter than the ribs 5. The bosses 7 are substantially circular. The use of a triangular ribbed structure is intended to provide more resistance to multi directional loading than a square ribbed structure.

The walls 6 have arcuate recesses 8 at intervals and the ribs 5 are discontinuous so as to allow for draining of water below the tiles.

The connection arrangement on the shaped tile is provided on that face 9 which in use is adapted to engage against a shaped connector tile. The connector arrangement includes a female semi-circular socket 11 and a locking tab 13.

The semi-circular recesses 11 also include a semi-circular stop arrangement 12 which engages into the loop on the shaped connector tile and prevents the connector from being pulled apart.

Between two connection sockets 11 is at least one abutment face 15 for receiving spring loaded fingers as will be discussed in relation to the shaped connector tiles.

Figures 3 and 4 show an underside and top side view of a shaped connector tile according to one embodiment of this invention.

The shaped connector tile includes a planar upper surface 20 with side walls 22 extending down to a floor engaging plane and extending out from each side wall at least one loop shaped connector means 24. In this embodiment there are three loop shaped connector means on each side of each connector tile but other numbers of loop shaped connector means may also be used. Between each loop shaped connector means is a spring loaded finger arrangement 26 as will be discussed later.

recesses 56. When a shaped tile is abutted with another shaped tile the projections 54 of one tile extend into the recesses 56 in the other tile in both directions as can be seen in the underside view shown in Figure 10 and this prevents one edge of a tile from lifting up with respect to the adjacent edge on another tile.

5

As can be seen in Figure 11 the thermal expansion of a shaped tile 60 which is expected to extend in all directions substantially equally will be taken up by the gaps between the adjacent shaped tiles and by the spring loaded fingers between the shaped tiles and the shaped connector tiles. The expected lines of force are shown by the arrows 62. By this arrangement it is expected that the overall dimensions of a floor formed from the shaped tiles and shaped connector tiles of the present invention will not change with thermal expansion and contraction as the changes in dimensions will be taken up in every joint.

10

15

Figure 12 shows a range of alternate shapes which can be used for the shaped connector tile and shaped tile according to alternative embodiments of the present invention.

20

Figure 12A shows an embodiment with substantially octagonal tiles 65 and circular connector tiles 67.

Figure 12B shows hexagonal shaped tiles 69 and circular connector tiles 71.

Figure 12C shows hexagonal shaped tiles 73 and hexagonal connector tiles 75.

25

Figure 12D shows dodecagonal shaped tiles 77 and circular connector tiles 79.

Figure 12E shows substantially octagonal shaped tiles 81 and diamond shaped connector tiles 83.

30

Figure 12F shows circular shaped tiles 85 with triangular connector tiles 87 with each of the sides of the triangular connector tiles being concave with

substantially the same radius of curvature as the radius of the shaped tiles 85. The vertices of each connector tile 87 almost touch adjacent connector tiles, therefore allowing connector attachment to each shaped tile over substantially the full circumference of each shaped tile 85. It may be noted, too, that there are no straight lines which may interfere with a hockey puck or a ball travelling on the surface.

Figure 13 shows various embodiments of shaped connector tiles specifically adapted to absorb expansion and contraction between adjacent shaped tiles.

Figures 13A and 13B show a first embodiment of alternative connector tiles. In this embodiment the connector tile is substantially triangular and has continuous connection recesses 92 on each of its sides and the adjacent shaped tile connects rigidly with the shaped connector tile. Thermal expansion and contraction is taken up in a Y-shaped slot 94 extending from each corner of the connector tile and meeting in the centre with integrally moulded spring loaded ribs 96 as can be seen in Figure 13A showing the underside of the tile which provide resistance to the closure of the Y-shaped gap and hence the triangular shaped tile is adapted to take up thermal expansion and contraction.

In the embodiment shown in Figures 13C and 13D the shaped connector tile 95 is made up from three separate portions 97. Each portion has an arcuate side 99 which includes the connectors to connect it to an adjacent shaped tile and two straight edges 101. The adjacent straight edges on two of the shaped portions 97 are spaced apart by a compressible elastomer type material so that a composite tile is formed. This compressible elastomer type material is adapted to take up the thermal expansion and contraction between the shaped tiles.

In an alternative embodiment the entire shape connector tile may be made from a compressible elastomer type material.

Figures 14 A and B, 15 and 16 show an alternative embodiment of connector and spring loaded finger arrangement according to the present invention.

Figures 14 A and B show a part view of the upper and under sides of an alternative embodiment of a shaped connector tile with connection means and spring loaded finger configuration. As with the earlier embodiments the underside has a triangulated rib structure bounded by a peripheral wall 112. The tile has an upper surface 110 with the side wall 112 at the periphery and with a slight bevel 114 between them. Connector loops 116 extend from the wall 112 and are adapted to be received in semi-circular recesses in the shaped tiles as will be seen in Figures 15 and 16. The connector loops 116 have recesses 122 on their inner sides to accept the catches on the shaped tiles as will be discussed with reference to Figure 15 and 16. Between each connector 116 is a depending finger 118 which is integrally moulded with the shaped tile. A dome 120 on the finger 118 in effect extends out from the plane of the wall 112 to engage against the wall of the shaped tile.

Figures 15 and 16 show a portion of the underside shaped tile. As with the earlier embodiments the underside has a triangulated rib structure 130 bounded by a peripheral wall 138. In the wall 138 of the shaped tile 128 is an arcuate recess 132 to receive the loop 116 of the connector tile and on the inner opening of the arcuate recess 132 at two positions 134 is a catch arrangement which is adapted to engage into the recesses 122 on the inner sides of the loops 116 on the connector tile 110. A feature of this type of clipping arrangement is that its major axis of clipping, is the same direction as the sliding movement experienced during tile expansion and contraction, making it easier to unclip the tiles when the tiles are in their expanded condition. During expansion and contraction the loop moves longitudinally in the arcuate recess 132, that is, the loop moves in a direction perpendicular to the wall 138 so that thermal expansion and contraction can be absorbed at each connection. The wall 138 includes recesses 136 to allow water drainage underneath the tiles and provides an abutment surface for the dome 120 of the spring loaded finger.

As discussed earlier the tiles may have apertures in their surfaces to allow for water to drain off the surface if the tiles are used outdoors. Figure 17 shows one possible arrangement of holes or apertures in the tiles. The upper surface 130 has a

pattern of circular and pentagonal apertures. The circular apertures 132 are aligned with the circular bosses 7 (see Figure 2) and the pentagonal apertures 131 are aligned with the spaces between the ribs 5 (see Figure 2).

5 Throughout this specification various indications have been given as to the scope of the invention but the invention is not limited to any one of these but may reside in two or more of these combined together. The examples are given for illustration only and not for limitation.

10 DATED this 17th day of January, 2002.

DESIGN DEVELOP COMMERCIALISE PTY LTD
By their Patent Attorneys
MADDERNS



15

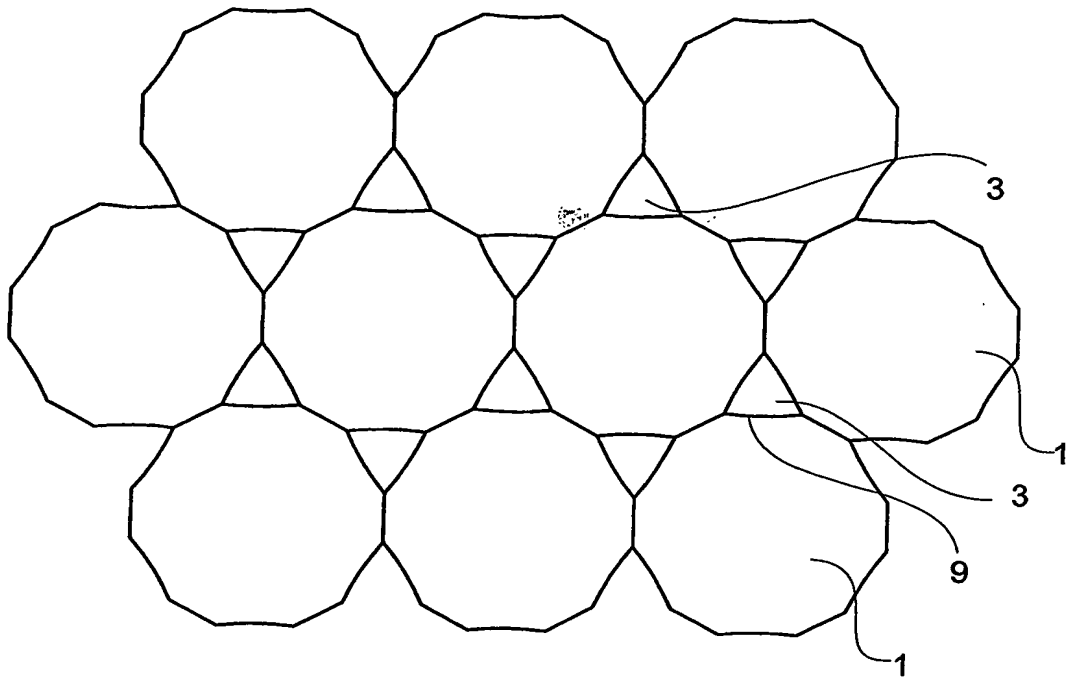


Fig 1

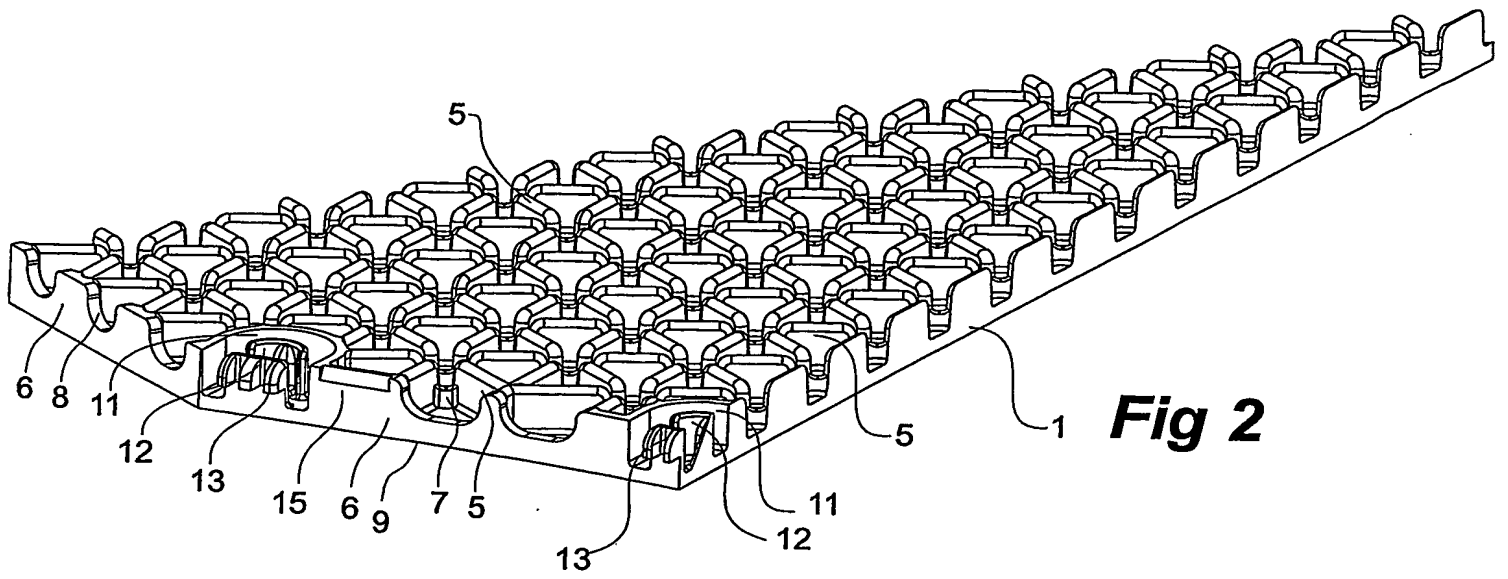


Fig 2

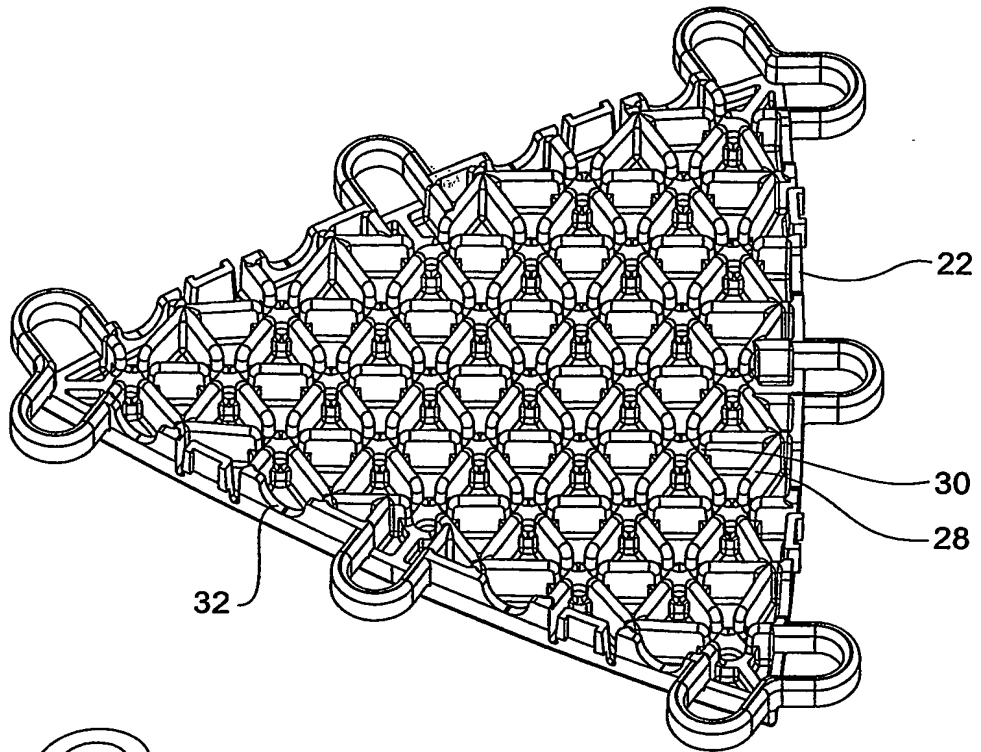


Fig 3

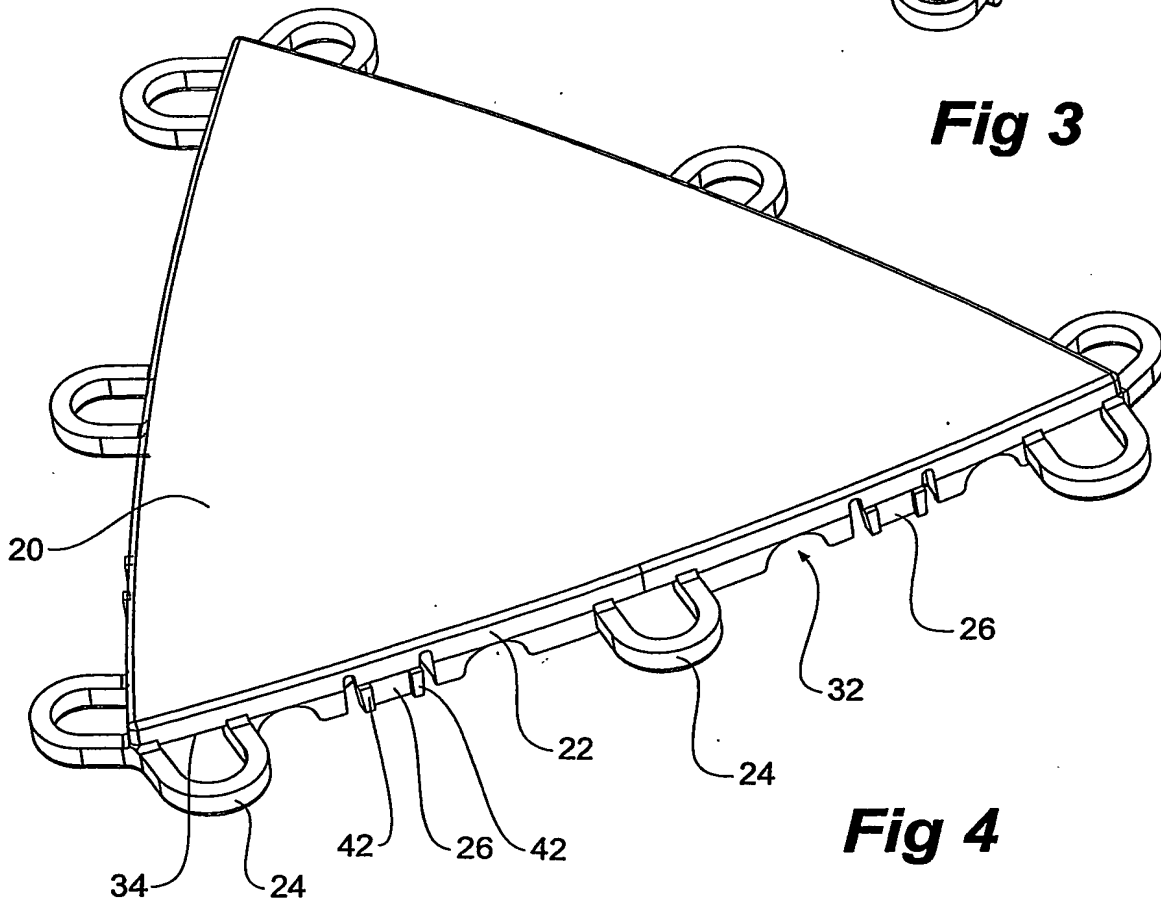


Fig 4

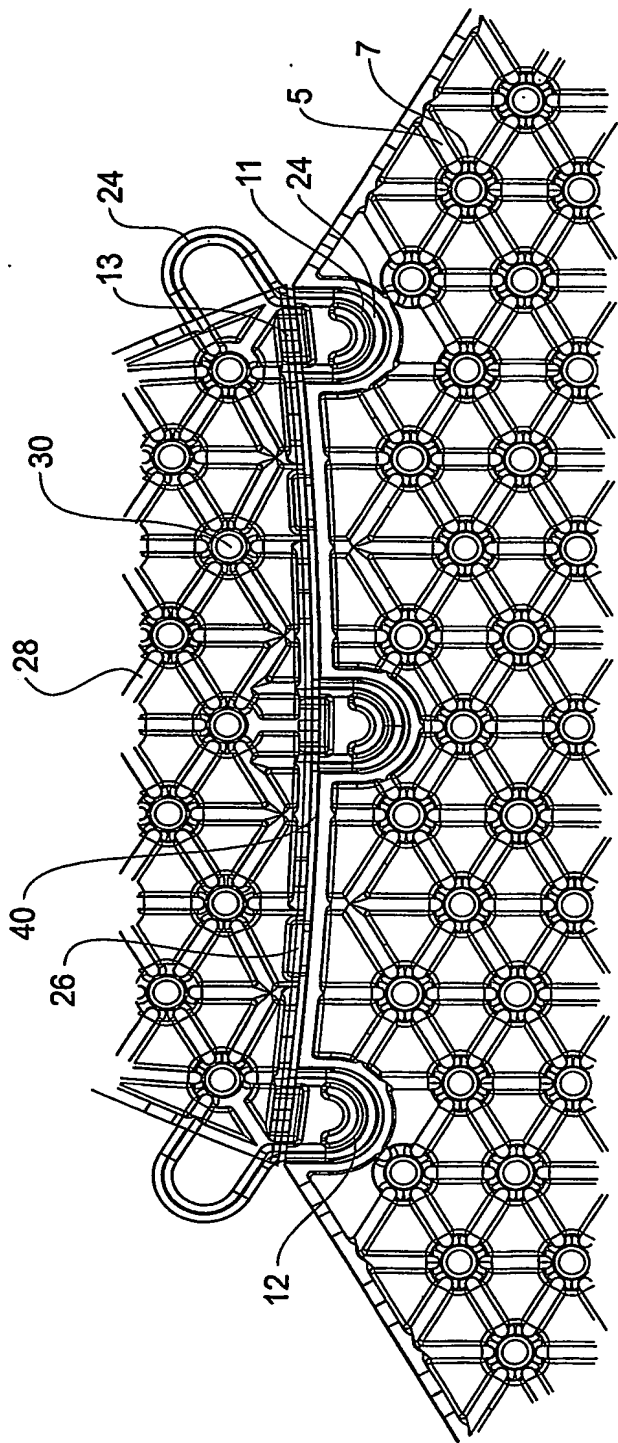


Fig 5

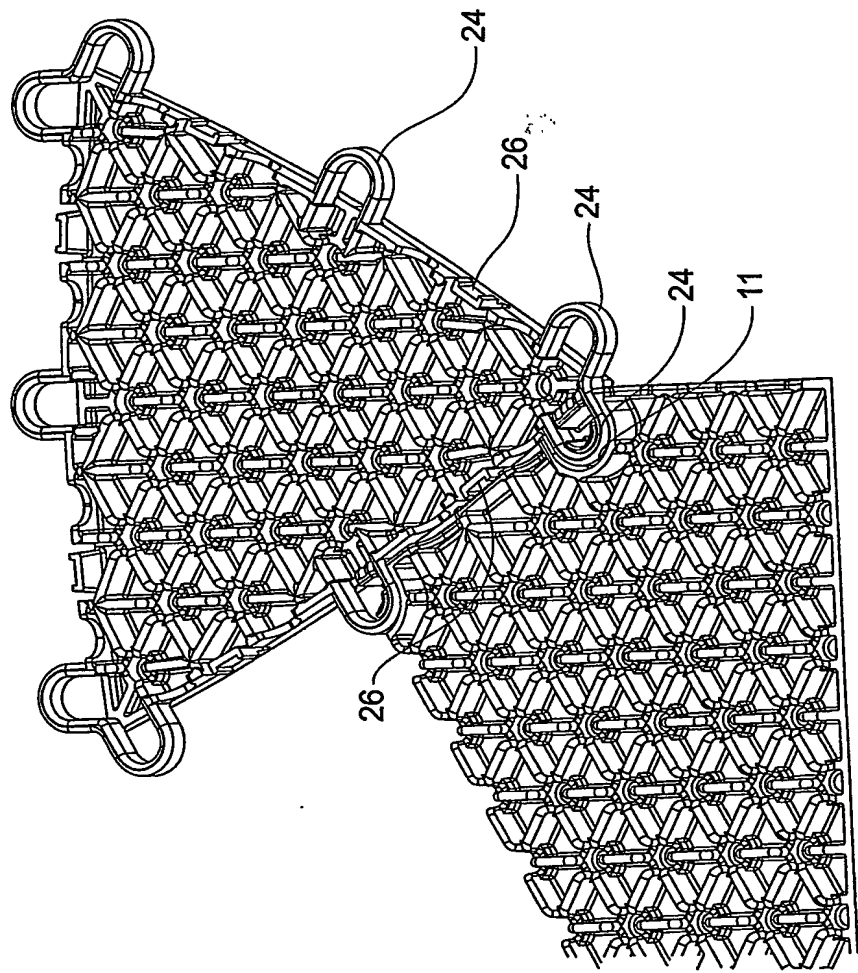


Fig 6

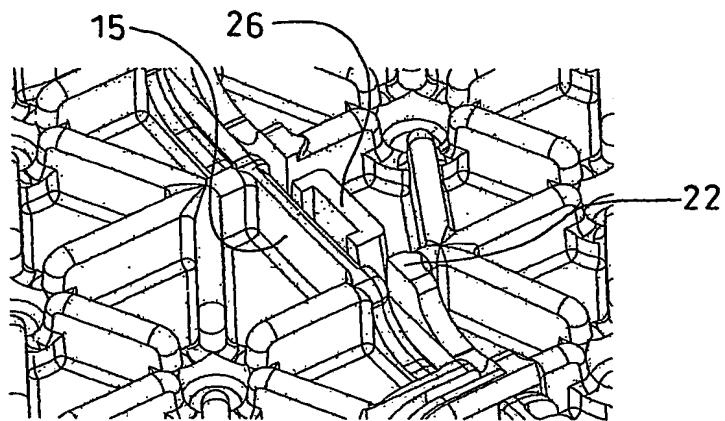


FIG 7

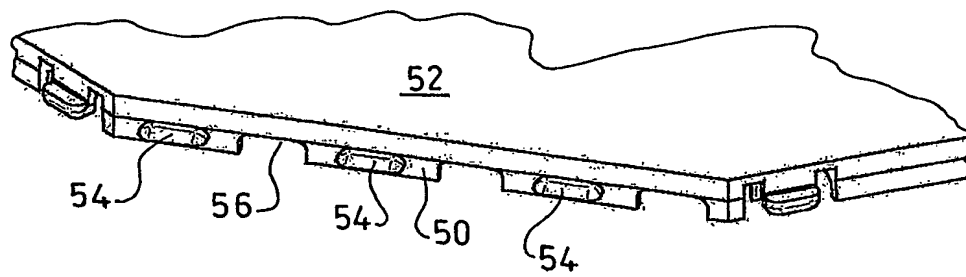


FIG 8

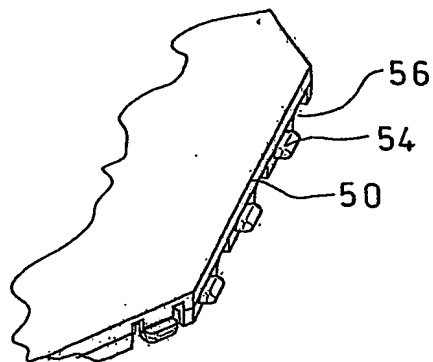


FIG 9

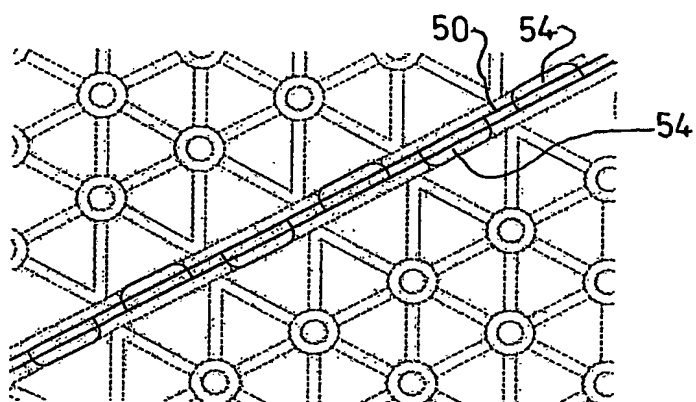


FIG 10



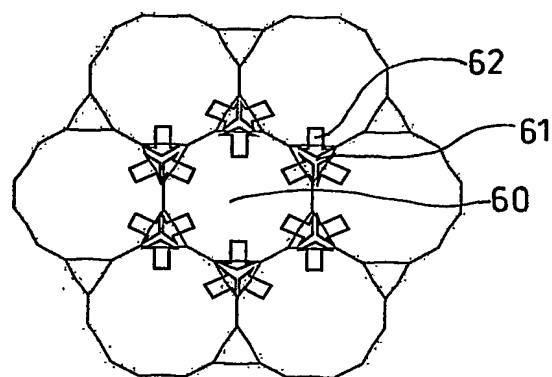



FIG 11

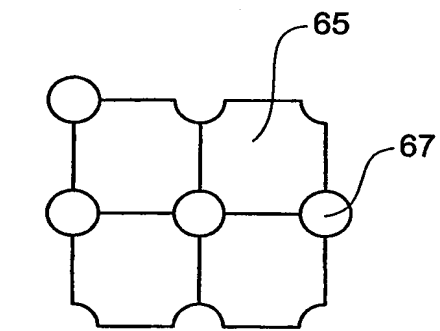


A

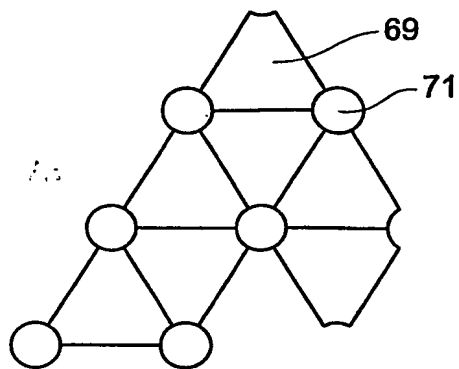


B

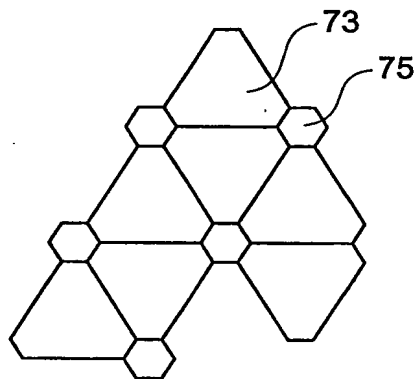


C

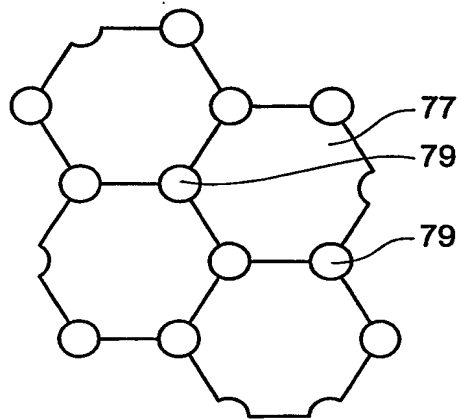

D

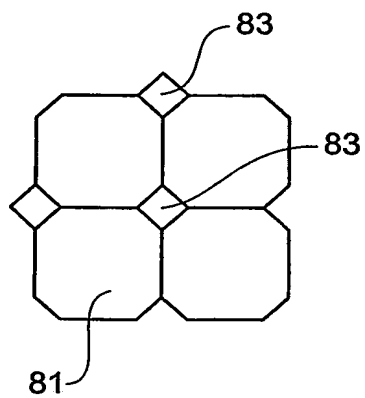

E

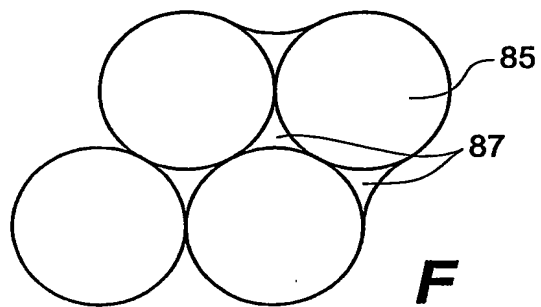

F

Fig 12

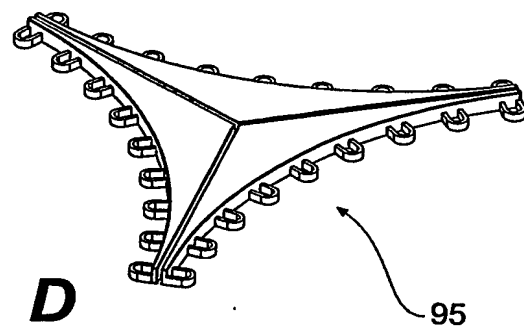
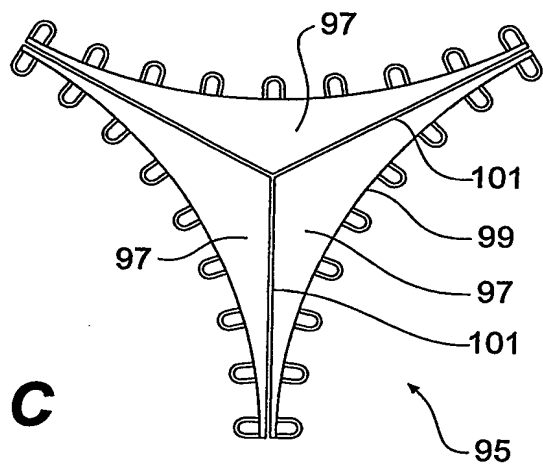
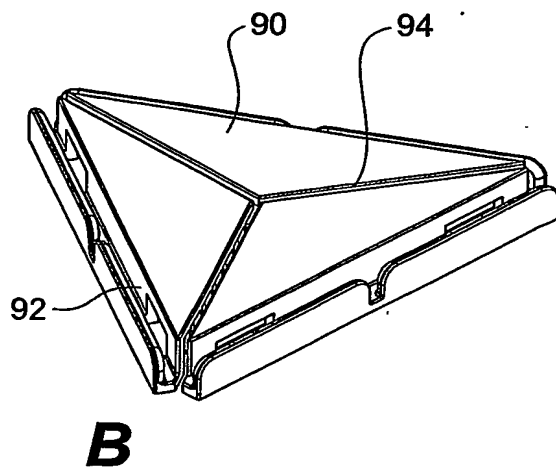
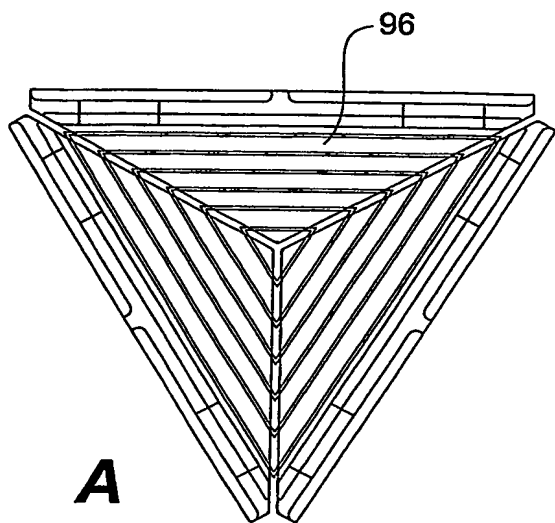


Fig 13

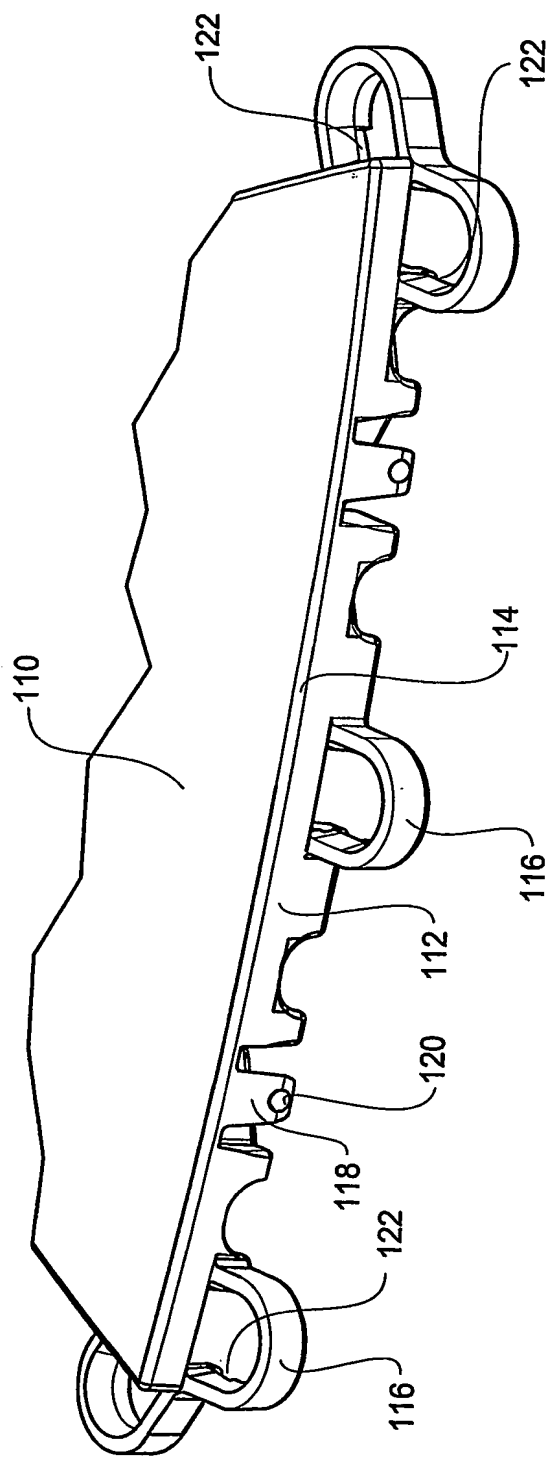


Fig 14A

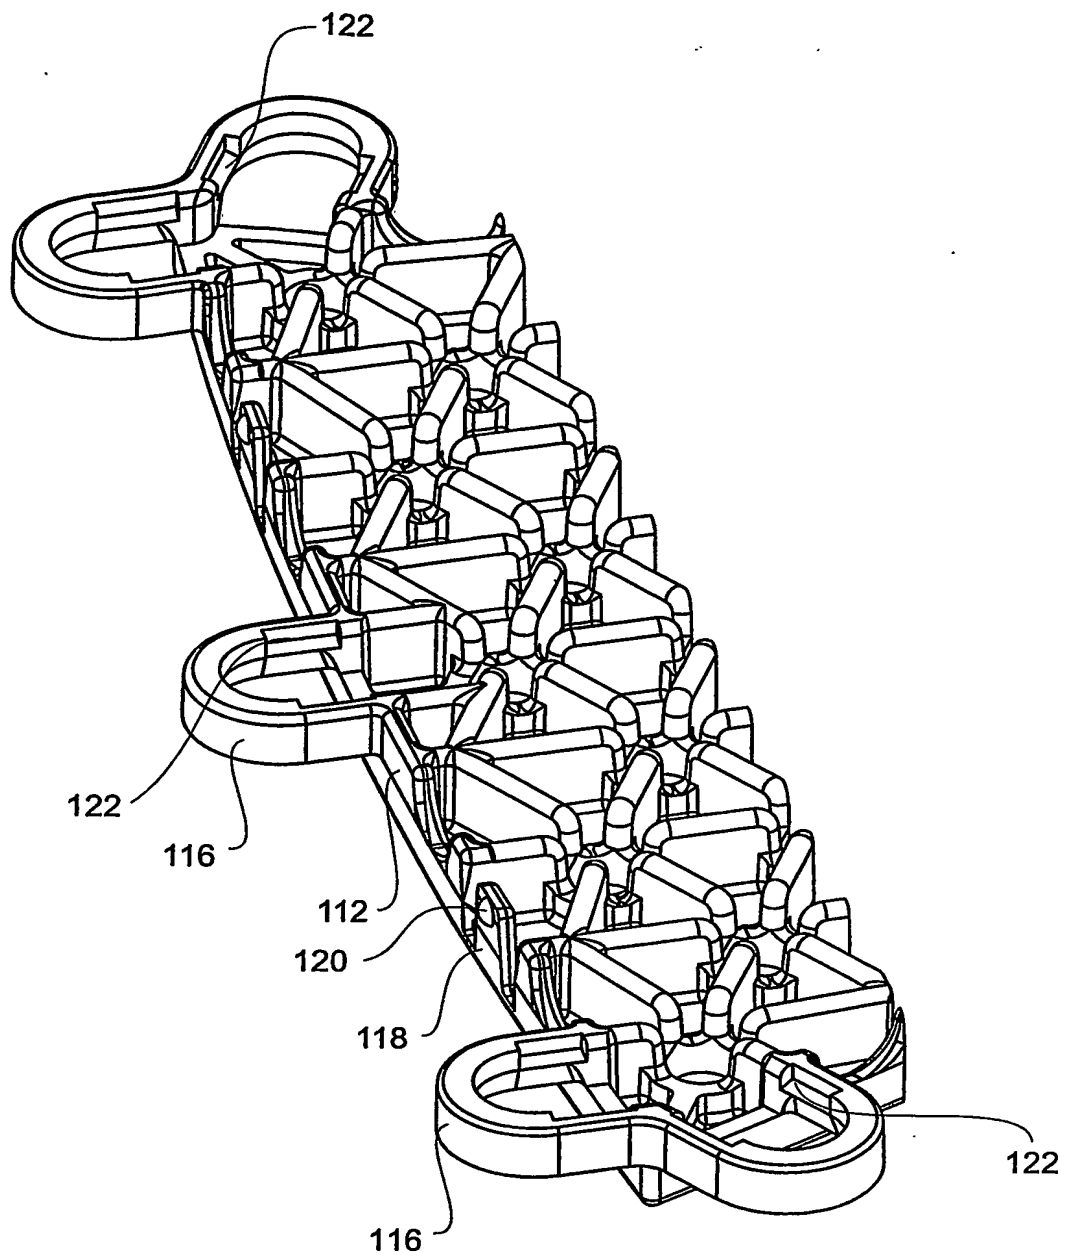
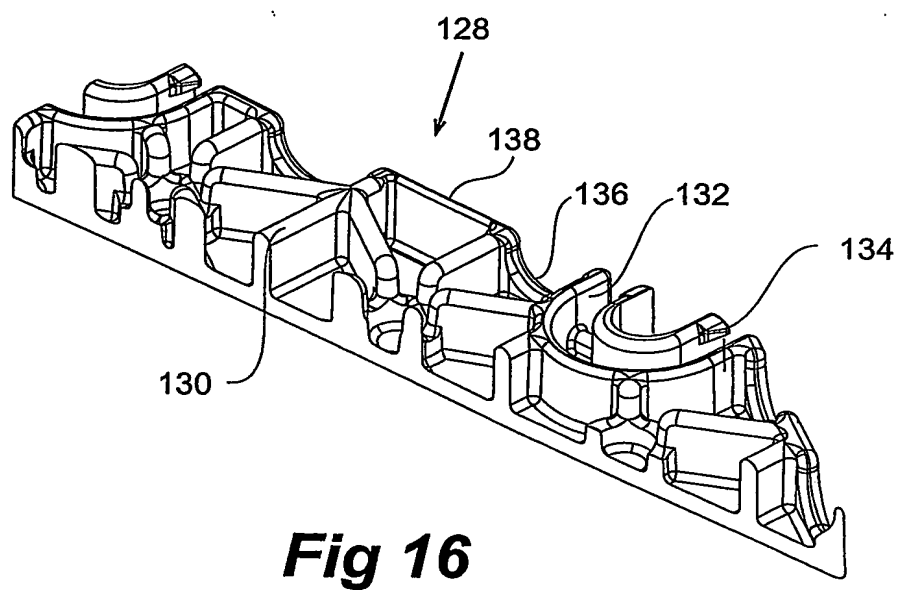
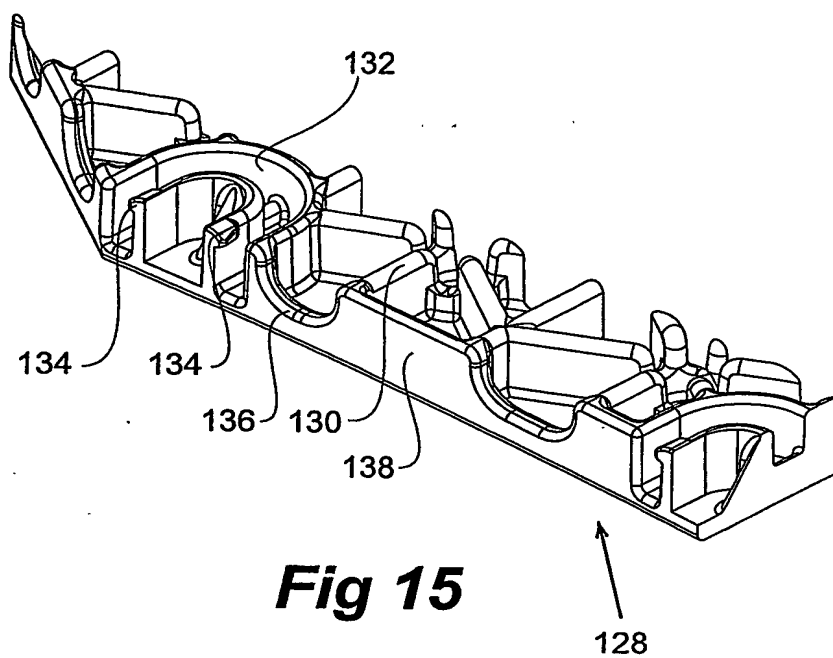


Fig 14B



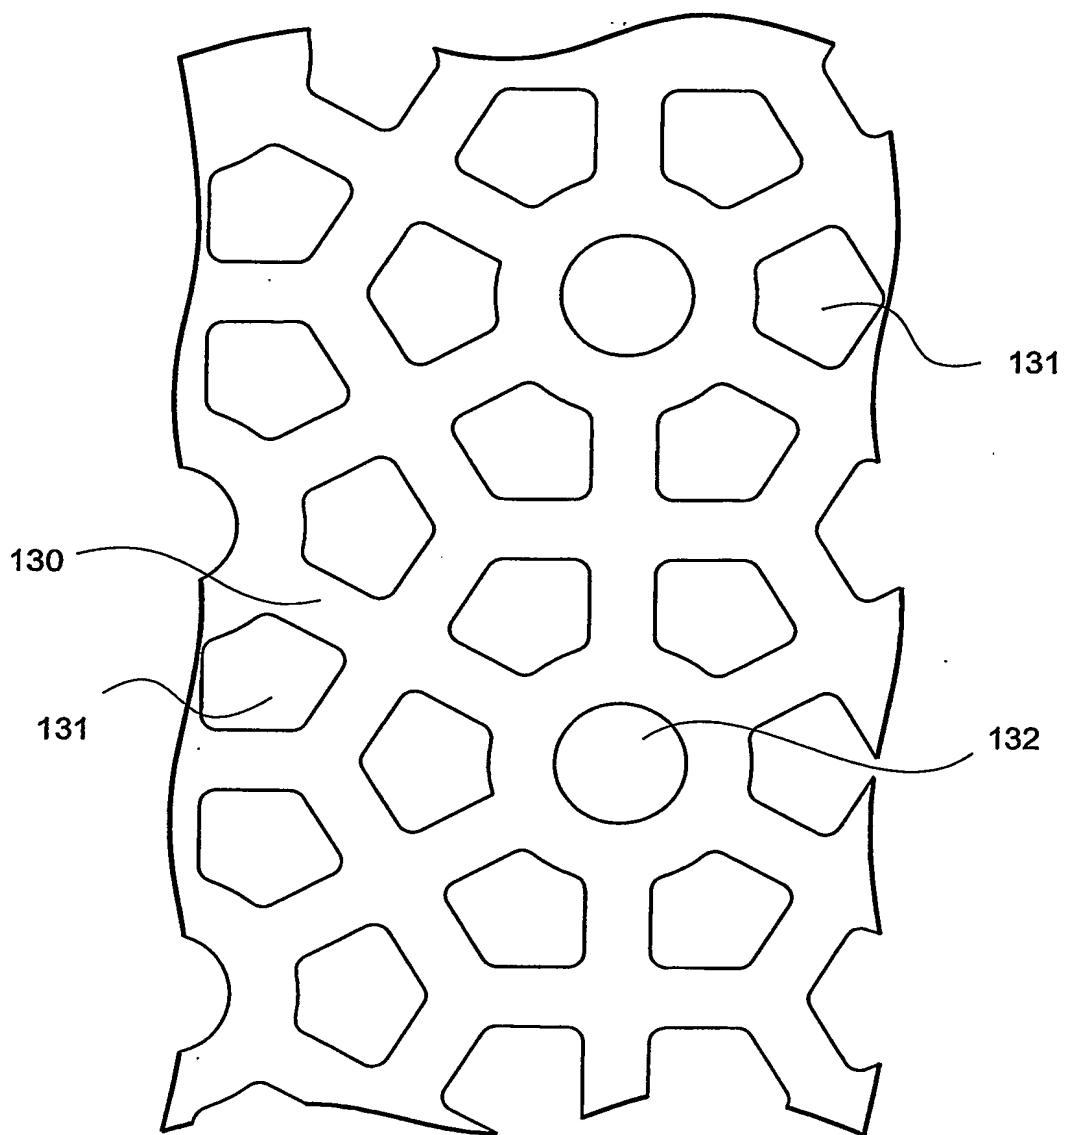


Fig 17